LADDER DIRECTION: LEFT - RIGHT

TOP VIEW

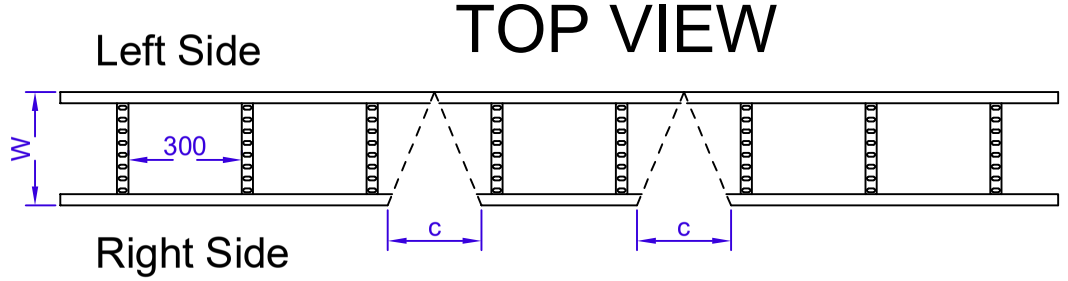

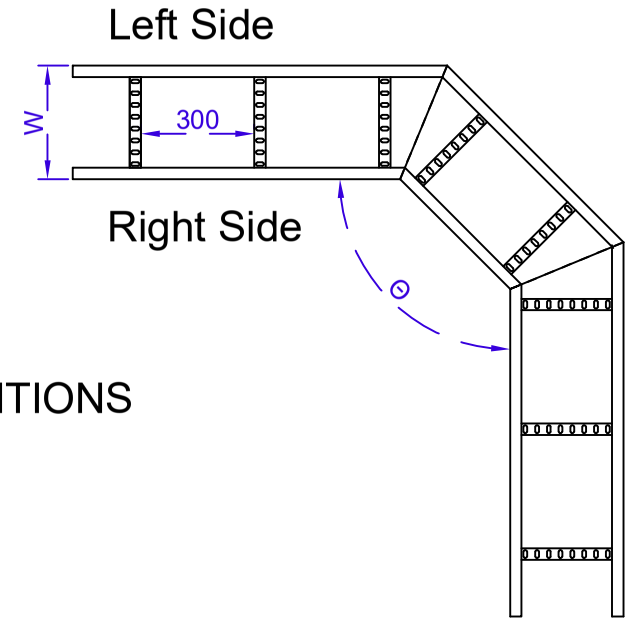

BEND TYPE
Angle: Θ[°]
Number of cut sets: n
Direction: Left or Right

CABLE LADDER DIMENTIONS
Width: W [mm]
Height: N/A

CUTTING DETAILS:
Cut set spacing (each set): c [mm]
Notes: Distance between adjacent cut sets

MATH FORMULA
c = 2 * W * tan(Θ / (2 * n)) [mm]

LADDER DIRECTION: RISE - FALL

SIDE VIEW

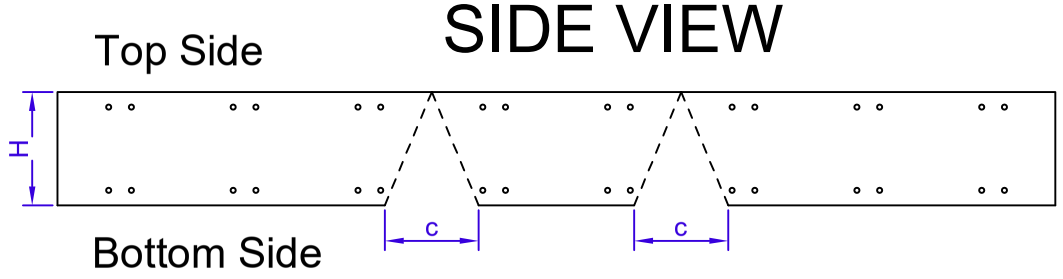

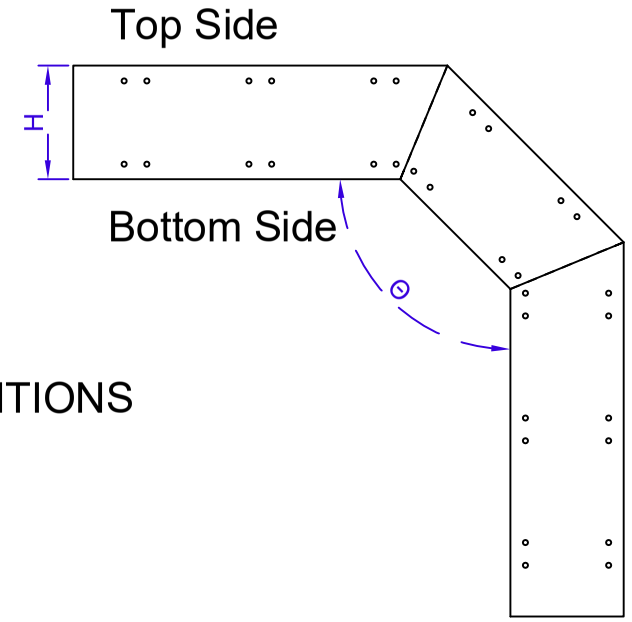

BEND TYPE
Angle: Θ[°]
Number of cut sets: n
Direction: Rise or Fall

CABLE LADDER DIMENTIONS
Width: N/A
Height: H [mm]

CUTTING DETAILS:
Cut set spacing (each set): c [mm]
Notes:
-Distance between adjacent cut sets
-Cut Layout shown for Fall direction. For Rise direction, invert the layout (swap top and bottom).

MATH FORMULA
c = 2 * H * tan(Θ / (2 * n)) [mm]

NO	DATE	REVISION	DES BY	DRN BY	CHK BY	APPO DES/ CON	DATE
		Revision Approvals by Designer/Contractor confirms designs are in accordance with the current procedures					

NO	DATE	REVISION	DES BY	DRN BY	CHK BY	APPO DES/ CON	DATE
		Revision Approvals by Designer/Contractor confirms designs are in accordance with the current procedures					

LECE
Industrial & Commercial Electricians
Belmont, 6107 WA
ABN:14 628 058 908
EC:13 662
https://www.lecegroup.com.au/

REVIEW TO COMPLETE	
COMPANY	
NAME	
SIGNED	
DATE	

DESIGNER TO COMPLETE	
COMPANY	
DESIGNED BY	
DRAWN BY	
CHECKED BY	
DESIGN & HSEC APPROVED BY	
DATE APPROVED	

LECE Pty Ltd

CABLE LADDER LAYOUT
2 SETS
DIRECTIONS: LEFT-RIGHT & RISE-FALL

SCALE 1:4

DGR. NO. LECE-ADM-LAD-LYT-002